



INVESTOR IN PEOPLE


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

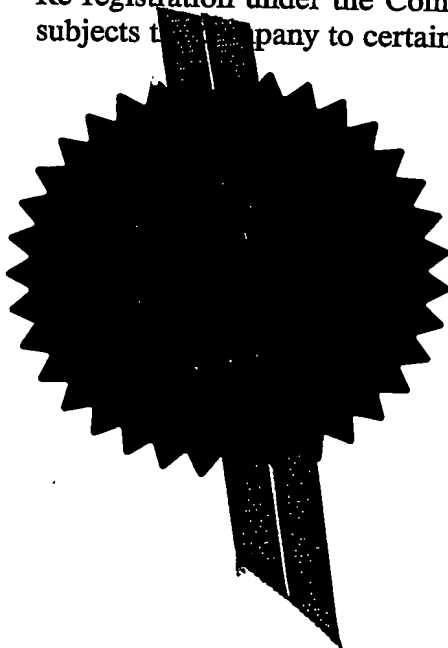

Signed

Am Brewster

Dated 17 December 2004

THE PATENT OFFICE
K
30 OCT 2003
Patent Office

30OCT03 E848360-2 D02973
P01/7700 0.00-0325338.2

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE
K
30 OCT 2003
NEWPORT

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

MRH/P103639GB

2. Patent application number

(The Patent Office will fill in this part)

30 OCT 2003

0325338.2

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

Brian James Murtagh
4 Holme Close
Hatfield Garden Village
Herts AL10 9LQ

Patents ADP number (*if you know it*) 07192131001

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

BOUND MATERIALS CORE MEASURING DEVICE

5. Name of your agent (*if you have one*)

Harrison Goddard Foote

"Address for service" in the United Kingdom to which all correspondence should be sent (*Including the postcode*)

Belgrave Hall
Belgrave Street
Leeds
LS2 8DD

Patents ADP number (*if you know it*)

14571001

0763131002

0763131002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description

6

Claim(s)

Abstract

Drawing(s)

1 + 1 

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)


Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date



29 October 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

MICHAEL HARRISON

0113 233 0100

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Bound Materials Core Measuring Device

Field of the Invention

5 The present invention relates to devices for the core measuring of bound materials, such devices being suitable, for example, for measuring the thickness of layers of surfacing material of a surfaced road or footway. Such bound material may be, for instance, cement-bound or bitumen-bound.

Background to the Invention

10 The quality and depth of road and footway surfacing plays an important role in safety for the road and pathway users. Partial subsidence or rucking of the surfacing material may trip a pedestrian on a footway or deflect the tyres of a road vehicle risking loss of control by the motorist.

15 Highways legislation covering the mandatory requirements for road and pavement quality and particularly depth of surfacing layers has tightened up considerably over recent years. Under the New Roads and Street Works Act, 1991 the allowed tolerance for thickness of upper surfacing layer or "wearing course" is to be within +10mm to -5mm of a specified thickness for a given material - most commonly
20 40mm. Very substantial penalties are exacted for failure to meet this requirement.

Through safety consciousness and the impact of the stringent legal obligations, those whose work entails excavating roads and pathways are obliged to take great care when reinstating those roads or pathways and are subject to official inspection of
25 their reinstatement work. In the case, for example, of cable television engineers who routinely channel through hundreds of miles of roads and footways to provide cable access to millions of consumers there is a very major budgetary burden to ensure that the roads and footways are properly reinstated and failure to meet the statutory requirement for surfacing layer thickness on inspection can greatly increase their
30 operating costs. Accordingly, it is very important to them to have a demonstrably precise and reliable gauge for measuring the thickness of core samples taken for

inspection.

Conventionally, the core samples for inspection are extracted from the site as vertical cylinders of the bound material generally between 100mm and 150mm in diameter and up to 300mm in depth although generally the most important portion to be measured, the wearing course, constitutes only the first 40mm or so. The core samples are sent to a government laboratory for measurement, taking days and weeks to process and removing any opportunity for witnessing or validation of the results. GB-A-2326722 discloses a bound materials core measuring device comprising a free-standing, rigid, transparent or apertured tubular body adapted to accommodate a core sample of road or pathway surfacing bound material and having a plurality of graduated scales extending therealong at spaced intervals therearound so as to enable the sample to be viewed through the body and the depth of the relevant one or more layers of the core sample to be measured from a plurality of angles by reading from each of the plurality of graduated scales.

The device disclosed in GB-A-2326722 has a plurality of fins extending across the tubular body which support any core sample held within the tubular body. The use of fin supports enable debris to drop away from beneath the core sample resting at the bottom of the tubular body to eliminate associated measurement errors. The fins serve also as support legs for the tubular body which extend from within the tubular body to the exterior thereof.

The baseline zero of the graduated scales is at the level on the tubular body at which a core sample comes to rest when placed in the tubular body. The fin legs are suitably adjustable to ensure that they are level with the baseline zero level before measuring commences.

Statements of the Invention

5 According to the present invention there is provided a bound materials core measuring device which comprises a tubular body adapted to accommodate a core sample of road or pathway surfacing bound material and having a plurality of graduated scales extending therealong at spaced intervals therearound so as to enable the sample to be viewed through the body and the depth of the relevant one or more
10 layers of core sample to be measured from a plurality of angles by reading from each of the plurality of graduated scales, wherein the tubular body has, located therewithin, means for supporting said core sample, said means being mounted for longitudinal movement relative to said tubular body and means, located within said tubular body, for effecting said longitudinal movement.

15

Preferably said tubular body comprises a rigid, transparent or apertured body.

Preferably said means for supporting said core sample includes a base member attached to the tubular body and, extending upwardly from said base member, a core
20 support element. More preferably said core support element is mounted for longitudinal movement relative to said base member. Most preferably said core support element extends through said base member and includes an adjustment member located below said base member. The core support element may be screw threadingly engaged with said support member.

25

Brief Description of the Drawings

The accompanying drawings are as follows:

Figure 1 is a perspective view of a bound materials core measuring device in accordance with the present invention

Figure 2 shows in more detail the lower part of the device of Figure 1;

Figure 3 is an exploded perspective view of the core support means of the device of Figure 1; and

Figure 4 is a top plan view of the device of Figure 1.

5

Detailed Description of the Invention

An embodiment of the invention will now be described, by way of example only, with reference to the accompanying drawings.

10

Referring to Figure 1 of the accompanying drawings, a bound materials core measuring device comprises a circular cylindrical tubular body 1 of stainless steel or other relatively robust material capable of withstanding the highly abrasive nature of bound material core samples. Tubular body 1 is open-ended at both top and bottom and is provided with three integral, equally peripherally spaced apart legs 3, there being a considerable gap between each pair of adjacent legs, as illustrated in Figure 1.

15

Although the metal tubular body 1 is opaque, the layers of the core sample may be viewed through each of six longitudinal apertures 5 spaced at equal intervals around the tubular body 1. Each of these apertures, or viewing ports, 5 has a scale 7, graduated in mm, running alongside it from a zero baseline located just above the level of the legs 3. For the first 80mm or so of its length, which corresponds to the wearing course of the core structure, each aperture 5 is relatively wide, suitably of the order of 6mm. Above this height, the aperture, which extends for approximately 250mm in the illustrated example, is of approximately half this breadth. This is because viewing is less crucial above the first 80mm and reducing the breadth of the aperture allows the strength of the tubular body 1 to be optimised.

20

25

The material of the tubular body 1 is chamfered along the aperture, adjacent scale 7, to provide reduction in any "parallax error" (due to the wall thickness of the cylinder affecting the accurate reading of the measurement). The chamfering of the body wall brings, in effect, the scale closer to the sample.

30

Located at the bottom of the cylinder, below the graduated scales, is a circular support member in the form of a boss 9 which has a substantially circular central portion 11 and, extending therefrom, three radially outwardly extending, equally spaced apart peripherally, arms 13. Each arm 13 is provided with a threaded blind bore 15. In the centre of the central portion 11 there is located a threaded through bore 17 extending from the upper to the lower surface of the boss 9.

The central circular portion 11 has a diameter which is about 50% of that of the cylinder 1. The three radial arms 13 have a width about one sixth of the circumference of cylinder 1, the length of each arm is such that the distance from the outer surface of each arm to the centre of circular portion 11 is close to that of the internal radius of cylinder 1 so that the boss fits snugly within cylinder 1 and can be connected thereto by means of screws 19 extending through the body of cylinder 1 into the blind threaded bores 15.

Extending through boss 9, and in threaded engagement therewith within through bore 17, is a threaded rod 21 having an integral fixed domed head 23 at its upper end. At its lower end rod 21 is provided with a knurled disc 25 which is also rigidly attached to rod 21. Located between disc 25 and the under surface of boss 9 is a threaded knurled disc 27 which is of greater diameter than disc 25 and which has a central threaded hole by which disc 27 is in screw threaded engagement with rod 21.

The threaded rod 21 carrying domed head 23 may be rotated by means of disc 25, accessed through the spaces between legs 3. Such rotation will cause the height of domed head 23 to be varied longitudinally with respect to cylinder 1. With a sample in position, therefore movement of head 23 may be effected to adjust the bottom of the sample to the height of the zero of the scales 7. The further disc 27 may then be turned so that it moves into engagement with the lower surface of boss 9 to lock the threaded rod in position.

In this way the overall device is very compact and yet it is very simple to adjust the bottom of the sample to the zero of the scales by a simple turning movement applied to the threaded rod 21 carrying the domed head 23.

5

P103639GB

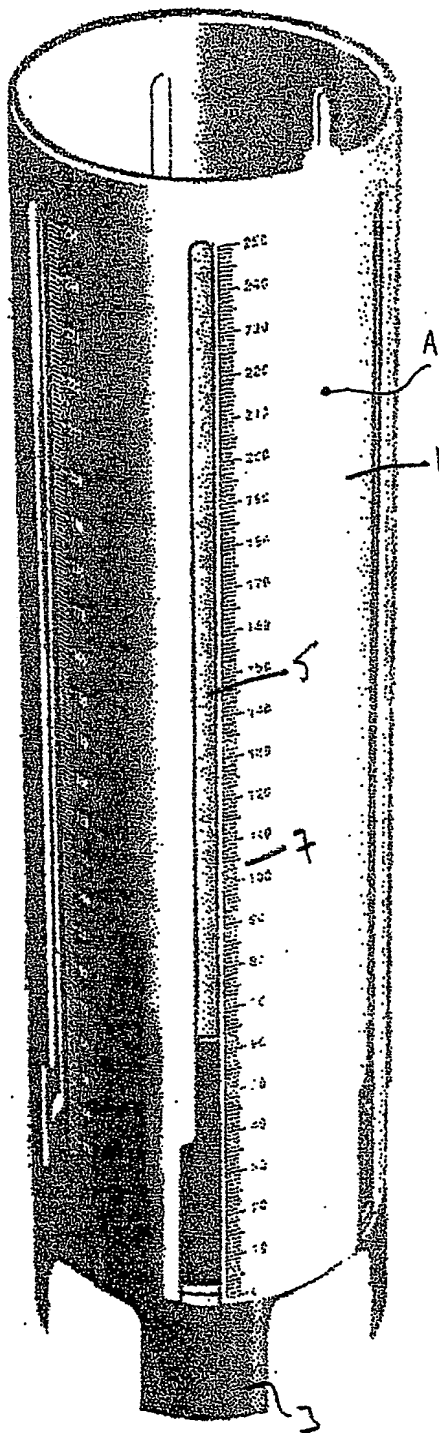


FIG 1

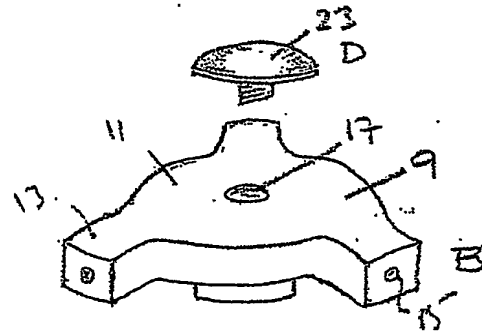


FIG 3

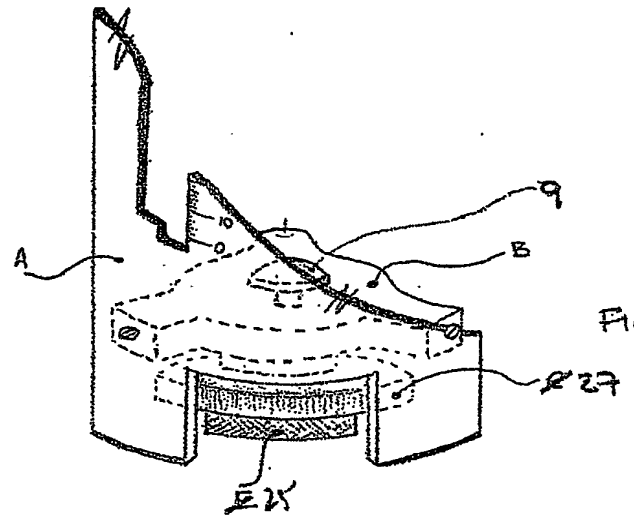



FIG 2

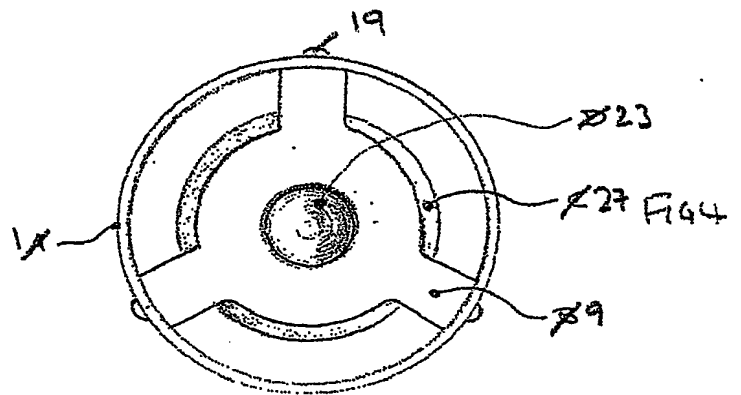


FIG 4

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB04/004571

International filing date: 28 October 2004 (28.10.2004)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0325338.2
Filing date: 30 October 2003 (30.10.2003)

Date of receipt at the International Bureau: 24 January 2005 (24.01.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.